


Hadamard Matrices/Operators



$$H^{\otimes 3} = \frac{1}{\sqrt{2^3}} \begin{bmatrix} 1 & 1 & 1 & 1 & 1 & 1 & 1 & 1 \\ 1 & -1 & 1 & -1 & 1 & -1 & 1 & -1 \\ 1 & 1 & -1 & -1 & 1 & 1 & -1 & -1 \\ 1 & -1 & -1 & 1 & 1 & -1 & -1 & 1 \\ 1 & 1 & 1 & 1 & -1 & -1 & -1 & -1 \\ 1 & -1 & 1 & -1 & -1 & 1 & -1 & 1 \\ 1 & 1 & -1 & -1 & -1 & -1 & 1 & 1 \\ 1 & -1 & -1 & 1 & -1 & 1 & 1 & -1 \end{bmatrix}$$

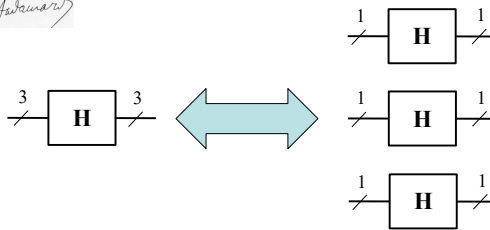

1

Hadamard Matrices

- Square Matrices with Mutually Orthonormal Rows/Columns
- All Matrix Elements are Either +1 or -1
- In Signal Processing, Known as the “Walsh Transform”
- Walsh Transform is Fourier Transform with Square Waves (Walsh Functions) as Basis Functions
 - Fourier Transform on Two-Element Additive Group $\mathbb{Z}_2 : (\{-1, +1\}, +_2)$
- Different Row Orderings Yield Variations of the Walsh Matrix


2

Hadamard Matrices

- Natural Row Ordering Defined by Outer/Tensor (Kronecker Product)
- Rademacher-Walsh Ordering Defined by XOR Operations among Adjacent Rows
- Transform can be Implemented Using $n \log n$ Operations ("Fast" Transform)
 - Can factor as sparse direct product factors
- Certain Forms can be Used Directly as Error Correcting Codes
- One Form is Known as the Reed-Muller Codes/Transform

3

Hadamard Matrix with Natural Ordering

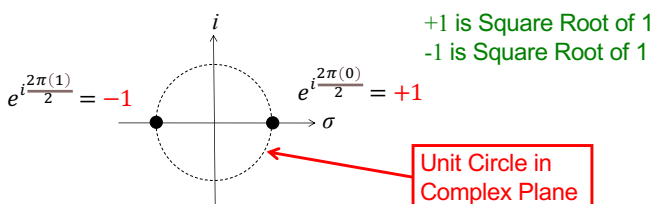



- This Form uses Square Roots of Unity Shown as Points on the Unit Circle in the Complex Plane
- Transform is a Discrete Fourier Transform over $GF(2)$
- Can Think of this as a Discrete Fourier Transform with Discretized Orthogonal Square Wave Functions as the Basis Set

4

Fast Hadamard Transform (FHT)

- So-called "fast" transforms and Butterfly Diagrams (Signal Flow Graphs)

$$\mathbf{H} \begin{bmatrix} x \\ y \end{bmatrix} = \frac{1}{\sqrt{2}} \begin{bmatrix} 1 & 1 \\ 1 & -1 \end{bmatrix} \begin{bmatrix} x \\ y \end{bmatrix} = \frac{1}{\sqrt{2}} \begin{bmatrix} x+y \\ x-y \end{bmatrix}$$

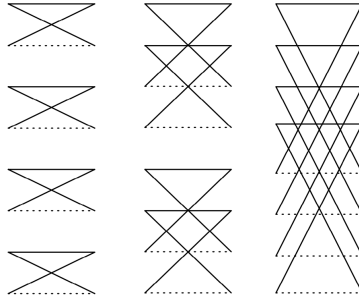

$$\mathbf{H} \otimes \mathbf{H} \otimes \mathbf{H} = \mathbf{H}^{\otimes 3}$$

5

FHT Matrix Factors

- Factor with Direct Matrix Product

$$\mathbf{H} \otimes \mathbf{H} \otimes \mathbf{H} = \mathbf{H}^{\otimes 3} = \frac{1}{\sqrt{2^3}} \begin{bmatrix} 1 & 1 & 1 & 1 & 1 & 1 & 1 & 1 \\ 1 & -1 & 1 & -1 & 1 & -1 & 1 & -1 \\ 1 & 1 & -1 & -1 & 1 & 1 & -1 & -1 \\ 1 & -1 & -1 & 1 & 1 & -1 & -1 & 1 \\ 1 & 1 & 1 & 1 & -1 & -1 & -1 & -1 \\ 1 & -1 & 1 & -1 & -1 & 1 & -1 & 1 \\ 1 & 1 & -1 & -1 & -1 & -1 & 1 & 1 \\ 1 & -1 & -1 & 1 & -1 & 1 & 1 & -1 \end{bmatrix}$$

$$= \frac{1}{\sqrt{2^3}} \begin{bmatrix} 1 & 0 & 0 & 0 & 1 & 0 & 0 & 0 \\ 0 & 1 & 0 & 0 & 0 & 1 & 0 & 0 \\ 0 & 0 & 1 & 0 & 0 & 0 & 1 & 0 \\ 0 & 0 & 0 & 1 & 0 & 0 & 0 & 1 \\ 1 & 0 & 0 & 0 & -1 & 0 & 0 & 0 \\ 0 & 1 & 0 & 0 & 0 & -1 & 0 & 0 \\ 0 & 0 & 1 & 0 & 0 & 0 & -1 & 0 \\ 0 & 0 & 0 & 1 & 0 & 0 & 0 & -1 \end{bmatrix} \begin{bmatrix} 1 & 0 & 1 & 0 & 0 & 0 & 0 & 0 \\ 0 & 1 & 0 & 1 & 0 & 0 & 0 & 0 \\ 0 & 0 & -1 & 0 & 0 & 0 & 0 & 0 \\ 0 & 1 & 0 & 0 & -1 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 1 & 0 & 1 & 0 \\ 0 & 0 & 0 & 0 & 0 & 1 & 0 & 1 \\ 0 & 0 & 0 & 0 & 1 & 0 & -1 & 0 \\ 0 & 0 & 0 & 0 & 0 & 1 & 0 & -1 \end{bmatrix} \begin{bmatrix} 1 & 1 & 0 & 0 & 0 & 0 & 0 & 0 \\ 1 & -1 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 1 & 1 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 1 & -1 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 1 & 1 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 1 & -1 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & 1 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & -1 \end{bmatrix}$$

6

FHT Butterfly Diagram

- So-called "fast" transforms due to Sparse Factors

$$H^8 = \frac{1}{\sqrt{2}} \begin{bmatrix} 1 & 0 & 0 & 0 & 1 & 0 & 0 & 0 \\ 0 & 1 & 0 & 0 & 0 & 1 & 0 & 0 \\ 0 & 0 & 1 & 0 & 0 & 0 & 1 & 0 \\ 0 & 0 & 0 & 1 & 0 & 0 & 0 & 1 \\ 0 & 0 & 0 & 0 & 1 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 1 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 1 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & 1 \end{bmatrix} \begin{bmatrix} 1 & 0 & 1 & 0 & 0 & 0 & 0 & 0 \\ 0 & 1 & 0 & 1 & 0 & 0 & 0 & 0 \\ 0 & 0 & -1 & 0 & 0 & 0 & 0 & 0 \\ 0 & 1 & 0 & -1 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 1 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 1 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 1 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 1 & 0 \end{bmatrix} \begin{bmatrix} 1 & 1 & 0 & 0 & 0 & 0 & 0 & 0 \\ 1 & -1 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 1 & 1 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 1 & -1 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 1 & 1 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 1 & 1 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 1 & -1 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & 1 \end{bmatrix}$$

Fast Hadamard Transform

- So-called "fast" transforms due to Sparse Factors

The diagram illustrates the Fast Hadamard Transform (FHT) through three stages of butterfly operations. The first stage (blue) shows four 2x2 butterfly operations. The second stage (green) shows four 4x4 butterfly operations. The third stage (red) shows four 8x8 butterfly operations. Below the diagrams are the corresponding sparse matrices for each stage, showing the distribution of 1s and -1s.

Stage 1 (Blue):

$$H^{\otimes 2} = \frac{1}{\sqrt{2}} \begin{bmatrix} 1 & 0 & 0 & 0 \\ 0 & 1 & 0 & 0 \\ 0 & 0 & 1 & 0 \\ 0 & 0 & 0 & 1 \end{bmatrix}$$

Stage 2 (Green):


$$H^{\otimes 4} = \begin{bmatrix} 1 & 0 & 1 & 0 & 0 & 0 & 0 & 0 \\ 0 & 1 & 0 & 1 & 0 & 0 & 0 & 0 \\ 0 & 0 & -1 & 0 & 0 & 0 & 0 & 0 \\ 0 & 1 & 0 & -1 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 1 & 0 & 1 & 0 \\ 0 & 0 & 0 & 0 & 0 & 1 & 0 & 1 \\ 0 & 0 & 0 & 0 & 1 & 0 & -1 & 0 \\ 0 & 0 & 0 & 0 & 0 & 1 & 0 & -1 \end{bmatrix}$$

Stage 3 (Red):

$$H^{\otimes 8} = \begin{bmatrix} 1 & 1 & 0 & 0 & 0 & 0 & 0 & 0 \\ 1 & -1 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 1 & 1 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 1 & -1 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 1 & 1 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 1 & -1 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 1 & 1 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & 1 \end{bmatrix}$$

FHT Example Computation

- Input on Left and Output on Right
- "Signals" Flow from Left to Right (Signal Flow Graph)

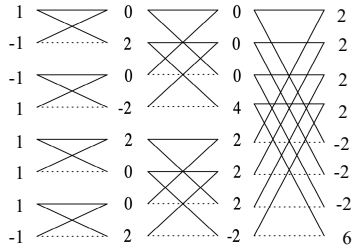


$$H^{8,3} = \frac{1}{\sqrt{2^3}} \begin{bmatrix} 1 & 0 & 0 & 0 & 1 & 0 & 0 & 0 & 1 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 1 & 0 & 0 & 0 & 1 & 0 & 0 & 0 & 1 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 1 & 0 & 0 & 0 & 1 & 0 & 0 & 0 & -1 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 1 & 0 & 0 & 0 & 1 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 1 & 0 & 0 & 0 & -1 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 1 & 0 & 0 & 0 & -1 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 1 & 0 & 0 & 0 & -1 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 1 & 0 & 0 & 0 & -1 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \end{bmatrix}$$

9

Fast Hadamard Transform


- Colored Butterfly Correspond to Colored Matrix Components



$$H^{8,3} = \frac{1}{\sqrt{2^3}} \begin{bmatrix} 1 & 0 & 0 & 0 & 1 & 0 & 0 & 0 & 1 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 1 & 0 & 0 & 0 & 1 & 0 & 0 & 0 & 1 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 1 & 0 & 0 & 0 & 1 & 0 & 0 & 0 & -1 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 1 & 0 & 0 & 0 & 1 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 1 & 0 & 0 & 0 & -1 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 1 & 0 & 0 & 0 & -1 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 1 & 0 & 0 & 0 & -1 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 1 & 0 & 0 & 0 & -1 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \end{bmatrix}$$

10

Verify FHT



$H^{\otimes 3} v = s$

$v = \begin{bmatrix} 1 \\ -1 \\ -1 \\ 1 \\ 1 \\ 1 \\ 1 \\ -1 \end{bmatrix}$


$s = \begin{bmatrix} 2 \\ 2 \\ 2 \\ -2 \\ -2 \\ -2 \\ -2 \\ 6 \end{bmatrix}$

$$H^{\otimes 3} = \frac{1}{\sqrt{2^3}} \begin{bmatrix} 1 & 0 & 0 & 0 & 1 & 0 & 0 & 0 \\ 0 & 1 & 0 & 0 & 0 & 1 & 0 & 0 \\ 0 & 0 & 1 & 0 & 0 & 0 & 1 & 0 \\ 0 & 0 & 0 & 1 & 0 & 0 & 0 & 1 \\ 1 & 0 & 0 & 0 & -1 & 0 & 0 & 0 \\ 0 & 1 & 0 & 0 & 0 & -1 & 0 & 0 \\ 0 & 0 & 1 & 0 & 0 & 0 & -1 & 0 \\ 0 & 0 & 0 & 1 & 0 & 0 & 0 & -1 \end{bmatrix}$$

$$H^{\otimes 3} v = \frac{1}{\sqrt{2^3}} \begin{bmatrix} 1 & 1 & 1 & 1 & 1 & 1 & 1 & 1 \\ 1 & -1 & 1 & -1 & 1 & -1 & 1 & -1 \\ 1 & 1 & -1 & -1 & 1 & 1 & -1 & -1 \\ 1 & -1 & 1 & 1 & -1 & -1 & 1 & -1 \\ 1 & 1 & 1 & -1 & -1 & 1 & -1 & 1 \\ 1 & -1 & 1 & -1 & -1 & 1 & -1 & 1 \\ 1 & 1 & -1 & -1 & -1 & -1 & 1 & 1 \\ 1 & -1 & -1 & 1 & -1 & 1 & -1 & -1 \end{bmatrix} \begin{bmatrix} 1 \\ -1 \\ -1 \\ 1 \\ 1 \\ 1 \\ 1 \\ -1 \end{bmatrix} = \frac{1}{\sqrt{2^3}} \begin{bmatrix} 2 \\ 2 \\ 2 \\ -2 \\ -2 \\ -2 \\ -2 \\ 6 \end{bmatrix}$$

11

Hadamard Matrix Rademacher-Walsh Ordering

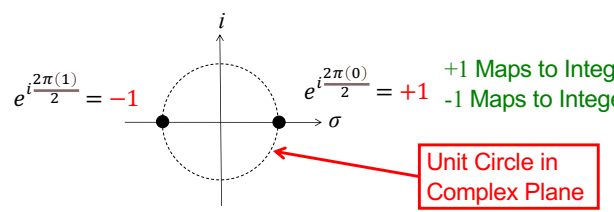

- This Form uses $\{+1, -1\}$ Values but Transform Rows and Columns are Permuted Compared to Natural Order Hadamard
 - Permutations Related to XOR of Integers $\{0, 1\}$ in Complex Exponential
- Transform Yields a Permuted Spectral (Output) Vector and is Not Often Used in Quantum Computing
- Cannot Form an Efficient/Recursive Signal Flow Structure (like the "Butterfly Diagram") with this Row Ordering

12

Rademacher-Walsh Transform

- Same as the Naturally-ordered Hadamard Transform with Rows/Columns Permuted
- Other Orderings Possible
- Referred to as "Walsh Transforms" in the Signal Processing Community
- Sometimes the Scale Factor $(1/\sqrt{2})^n$ is Not Used in Signal Processing Applications

Map 0 to +1


Map 1 to -1

XOR Upper Rows
to form Lower Rows

$$H_{RW} = \begin{bmatrix} 1 & 1 & 1 & 1 & 1 & 1 & 1 & 1 \\ 1 & 1 & -1 & -1 & 1 & 1 & -1 & -1 \\ 1 & -1 & 1 & -1 & 1 & -1 & 1 & -1 \\ 1 & -1 & -1 & 1 & 1 & -1 & -1 & 1 \\ 1 & -1 & 1 & -1 & -1 & 1 & -1 & 1 \\ 1 & 1 & -1 & -1 & -1 & -1 & 1 & 1 \\ 1 & -1 & -1 & 1 & -1 & 1 & 1 & -1 \end{bmatrix} \begin{matrix} 0 \\ x \\ y \\ z \\ y \oplus z \\ x \oplus z \\ x \oplus y \\ x \oplus y \oplus z \end{matrix}$$

13


Reed-Muller Matrix with Natural Ordering

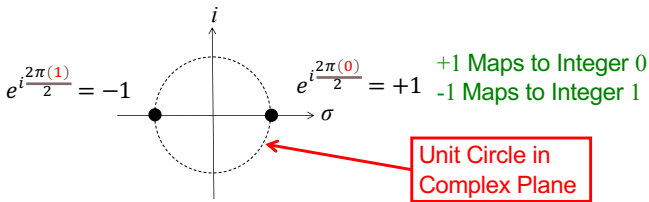

- This Form uses Boolean Logic Values $\{0, 1\}$ in Complex Exponential Instead of Mappings to the Unit Circle in the Complex Plane
- Transform Yield a Form of ESOP in Classical Logic
 - Related to Toffoli Gates: Used in Reversible Logic Synthesis

14

Reed-Muller Form of Hadamard Matrix

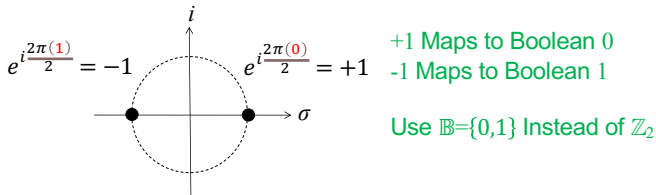

- This Form Uses the Boolean Logic Values, $\{0,1\}$, Instead of Mappings to the Unit Circle in the Complex Plane
- Transform Yields a Form of ESOP in Classical Logic

$$\mathbf{R}^{\otimes 3} = \mathbf{R}_3 = \mathbf{R}_1 \otimes \mathbf{R}_1 \otimes \mathbf{R}_1 = \begin{bmatrix} 1 & 1 \\ 1 & 0 \end{bmatrix} \otimes \begin{bmatrix} 1 & 1 \\ 1 & 0 \end{bmatrix} \otimes \begin{bmatrix} 1 & 1 \\ 1 & 0 \end{bmatrix}$$

15

Reed-Muller Form of Hadamard Matrix

$$\mathbf{R}^{\otimes 3} = \mathbf{R}_3 = \mathbf{R}_1 \otimes \mathbf{R}_1 \otimes \mathbf{R}_1 = \begin{bmatrix} 1 & 1 \\ 1 & 0 \end{bmatrix} \otimes \begin{bmatrix} 1 & 1 \\ 1 & 0 \end{bmatrix} \otimes \begin{bmatrix} 1 & 1 \\ 1 & 0 \end{bmatrix}$$

$$\mathbf{R}^{\otimes 3} = \otimes_{i=1}^3 \begin{bmatrix} 1 & 1 \\ 1 & 0 \end{bmatrix} = \begin{bmatrix} 1 & 1 \\ 1 & 0 \end{bmatrix} \otimes \begin{bmatrix} 1 & 1 & 1 & 1 \\ 1 & 0 & 1 & 0 \\ 1 & 1 & 0 & 0 \\ 1 & 0 & 0 & 0 \end{bmatrix}$$


$$\mathbf{R}^{\otimes 3} = \begin{bmatrix} 1 & 1 & 1 & 1 & 1 & 1 & 1 & 1 \\ 1 & 0 & 1 & 0 & 1 & 0 & 1 & 0 \\ 1 & 1 & 0 & 0 & 1 & 1 & 0 & 0 \\ 1 & 0 & 0 & 0 & 1 & 0 & 0 & 0 \\ 1 & 1 & 1 & 1 & 0 & 0 & 0 & 0 \\ 1 & 0 & 1 & 0 & 0 & 0 & 0 & 0 \\ 1 & 1 & 0 & 0 & 0 & 0 & 0 & 0 \\ 1 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \end{bmatrix}$$

16

Naturally Ordered Hadamard

$$\mathbf{H}^{\otimes 3} = \mathbf{H} \otimes \mathbf{H} \otimes \mathbf{H} = \frac{1}{\sqrt{2}} \begin{bmatrix} 1 & 1 \\ 1 & -1 \end{bmatrix} \otimes \frac{1}{\sqrt{2}} \begin{bmatrix} 1 & 1 \\ 1 & -1 \end{bmatrix} \otimes \frac{1}{\sqrt{2}} \begin{bmatrix} 1 & 1 \\ 1 & -1 \end{bmatrix}$$

$$\mathbf{H}^{\otimes 3} = \mathbf{H} \otimes \mathbf{H} \otimes \mathbf{H} = \frac{1}{\sqrt{2}} \begin{bmatrix} 1 & 1 \\ 1 & -1 \end{bmatrix} \otimes \frac{1}{\sqrt{2^2}} \begin{bmatrix} 1 & 1 & 1 & 1 \\ 1 & -1 & 1 & -1 \\ 1 & 1 & -1 & -1 \\ 1 & -1 & -1 & 1 \end{bmatrix}$$



$$\mathbf{H}^{\otimes 3} = \frac{1}{\sqrt{2^3}} \begin{bmatrix} 1 & 1 & 1 & 1 & 1 & 1 & 1 & 1 \\ 1 & -1 & 1 & -1 & 1 & -1 & 1 & -1 \\ 1 & 1 & -1 & -1 & 1 & 1 & -1 & -1 \\ 1 & -1 & -1 & 1 & 1 & -1 & -1 & 1 \\ 1 & 1 & 1 & 1 & -1 & -1 & -1 & -1 \\ 1 & -1 & 1 & -1 & -1 & 1 & -1 & 1 \\ 1 & 1 & -1 & -1 & -1 & -1 & 1 & 1 \\ 1 & -1 & -1 & 1 & -1 & 1 & 1 & -1 \end{bmatrix}$$

17

Hadamard & Superposition

$$\mathbf{H}^{\otimes 3}|000\rangle = \frac{1}{\sqrt{2^3}} \begin{bmatrix} 1 & 1 & 1 & 1 & 1 & 1 & 1 & 1 \\ 1 & -1 & 1 & -1 & 1 & -1 & 1 & -1 \\ 1 & 1 & -1 & -1 & 1 & 1 & -1 & -1 \\ 1 & -1 & -1 & 1 & 1 & -1 & -1 & 1 \\ 1 & 1 & 1 & 1 & -1 & -1 & -1 & -1 \\ 1 & -1 & 1 & -1 & -1 & 1 & -1 & 1 \\ 1 & 1 & -1 & -1 & -1 & -1 & 1 & 1 \\ 1 & -1 & -1 & 1 & -1 & 1 & 1 & -1 \end{bmatrix} \begin{bmatrix} 1 \\ 0 \\ 0 \\ 0 \\ 0 \\ 0 \\ 0 \\ 0 \end{bmatrix}$$

$$\mathbf{H}^{\otimes 3}|000\rangle = \frac{1}{\sqrt{2^3}} \begin{bmatrix} 1 \\ 1 \\ 1 \\ 1 \\ 1 \\ 1 \\ 1 \\ 1 \end{bmatrix} = \frac{1}{\sqrt{2^3}} \left(\begin{bmatrix} 1 \\ 0 \\ 0 \\ 0 \\ 0 \\ 0 \\ 0 \\ 0 \end{bmatrix} + \begin{bmatrix} 0 \\ 1 \\ 0 \\ 0 \\ 0 \\ 0 \\ 0 \\ 0 \end{bmatrix} + \dots + \begin{bmatrix} 0 \\ 0 \\ 0 \\ 0 \\ 0 \\ 0 \\ 1 \\ 0 \end{bmatrix} \right)$$

$$\mathbf{H}^{\otimes 3}|000\rangle = \frac{1}{\sqrt{2^3}} (|000\rangle + |001\rangle + \dots + |111\rangle)$$

18

Naturally Ordered Hadamard

- Alternative Notation (using symbolic logic)
 - Conjunctive Logic Operation (Binary AND function): $\wedge$

$$\mathbf{H} = [h_{ij}] = \frac{1}{\sqrt{2}}(-1)^{i \wedge j}$$

- i and j are row and column numbers
- Can Rewrite Hadamard Matrix as:

$$\mathbf{H} = \frac{1}{\sqrt{2}} \begin{bmatrix} \overset{0}{(-1)^{0 \wedge 0}} & \overset{1}{(-1)^{0 \wedge 1}} \\ \overset{1}{(-1)^{1 \wedge 0}} & \overset{1}{(-1)^{1 \wedge 1}} \end{bmatrix} \begin{matrix} \overset{0}{0} \\ \overset{1}{1} \end{matrix}$$

column numbers

row numbers

19

Naturally Ordered Hadamard

$$\mathbf{H}^{\otimes 2} = \frac{1}{\sqrt{2}} \begin{bmatrix} \overset{00}{(-1)^{0 \wedge 0}} & \overset{01}{(-1)^{0 \wedge 1}} \\ \overset{10}{(-1)^{1 \wedge 0}} & \overset{11}{(-1)^{1 \wedge 1}} \end{bmatrix} \begin{matrix} \overset{0}{0} \\ \overset{1}{1} \end{matrix} \otimes \frac{1}{\sqrt{2}} \begin{bmatrix} \overset{0}{(-1)^{0 \wedge 0}} & \overset{1}{(-1)^{0 \wedge 1}} \\ \overset{1}{(-1)^{1 \wedge 0}} & \overset{1}{(-1)^{1 \wedge 1}} \end{bmatrix} \begin{matrix} \overset{0}{0} \\ \overset{1}{1} \end{matrix}$$

$$\mathbf{H}^{\otimes 2} = \left(\frac{1}{\sqrt{2}} \times \frac{1}{\sqrt{2}} \right) \begin{bmatrix} \overset{00}{(-1)^{0 \wedge 0} \times (-1)^{0 \wedge 0}} & \overset{01}{(-1)^{0 \wedge 0} \times (-1)^{0 \wedge 1}} & \overset{10}{(-1)^{0 \wedge 1} \times (-1)^{0 \wedge 0}} & \overset{11}{(-1)^{0 \wedge 1} \times (-1)^{0 \wedge 1}} \\ \overset{00}{(-1)^{0 \wedge 0} \times (-1)^{1 \wedge 0}} & \overset{01}{(-1)^{0 \wedge 0} \times (-1)^{1 \wedge 1}} & \overset{10}{(-1)^{0 \wedge 1} \times (-1)^{1 \wedge 0}} & \overset{11}{(-1)^{0 \wedge 1} \times (-1)^{1 \wedge 1}} \\ \overset{10}{(-1)^{1 \wedge 0} \times (-1)^{0 \wedge 0}} & \overset{11}{(-1)^{1 \wedge 0} \times (-1)^{0 \wedge 1}} & \overset{00}{(-1)^{1 \wedge 1} \times (-1)^{0 \wedge 0}} & \overset{01}{(-1)^{1 \wedge 1} \times (-1)^{0 \wedge 1}} \\ \overset{10}{(-1)^{1 \wedge 0} \times (-1)^{1 \wedge 0}} & \overset{11}{(-1)^{1 \wedge 0} \times (-1)^{1 \wedge 1}} & \overset{00}{(-1)^{1 \wedge 1} \times (-1)^{1 \wedge 0}} & \overset{01}{(-1)^{1 \wedge 1} \times (-1)^{1 \wedge 1}} \end{bmatrix} \begin{matrix} \overset{00}{00} \\ \overset{01}{01} \\ \overset{10}{10} \\ \overset{11}{11} \end{matrix}$$

- Multiply $(-1)^x$ by $(-1)^y = (-1)^{x+y}$:

$$\mathbf{H}^{\otimes 2} = \left(\frac{1}{\sqrt{2}} \times \frac{1}{\sqrt{2}} \right) \begin{bmatrix} \overset{00}{(-1)^{0 \wedge 0 + 0 \wedge 0}} & \overset{01}{(-1)^{0 \wedge 0 + 0 \wedge 1}} & \overset{10}{(-1)^{0 \wedge 1 + 0 \wedge 0}} & \overset{11}{(-1)^{0 \wedge 1 + 0 \wedge 1}} \\ \overset{00}{(-1)^{0 \wedge 0 + 1 \wedge 0}} & \overset{01}{(-1)^{0 \wedge 0 + 1 \wedge 1}} & \overset{10}{(-1)^{0 \wedge 1 + 1 \wedge 0}} & \overset{11}{(-1)^{0 \wedge 1 + 1 \wedge 1}} \\ \overset{10}{(-1)^{1 \wedge 0 + 0 \wedge 0}} & \overset{11}{(-1)^{1 \wedge 0 + 0 \wedge 1}} & \overset{00}{(-1)^{1 \wedge 1 + 0 \wedge 0}} & \overset{01}{(-1)^{1 \wedge 1 + 0 \wedge 1}} \\ \overset{10}{(-1)^{1 \wedge 0 + 1 \wedge 0}} & \overset{11}{(-1)^{1 \wedge 0 + 1 \wedge 1}} & \overset{00}{(-1)^{1 \wedge 1 + 1 \wedge 0}} & \overset{01}{(-1)^{1 \wedge 1 + 1 \wedge 1}} \end{bmatrix} \begin{matrix} \overset{00}{00} \\ \overset{01}{01} \\ \overset{10}{10} \\ \overset{11}{11} \end{matrix}$$

$$\mathbf{H}^{\otimes 2} = \left(\frac{1}{\sqrt{2}} \times \frac{1}{\sqrt{2}} \right) \begin{bmatrix} \overset{00}{(-1)^0} & \overset{01}{(-1)^0} & \overset{10}{(-1)^0} & \overset{11}{(-1)^0} \\ \overset{00}{(-1)^0} & \overset{01}{(-1)^1} & \overset{10}{(-1)^0} & \overset{11}{(-1)^1} \\ \overset{10}{(-1)^0} & \overset{11}{(-1)^0} & \overset{00}{(-1)^1} & \overset{01}{(-1)^1} \\ \overset{10}{(-1)^0} & \overset{11}{(-1)^1} & \overset{00}{(-1)^1} & \overset{01}{(-1)^2} \end{bmatrix} \begin{matrix} \overset{00}{00} \\ \overset{01}{01} \\ \overset{10}{10} \\ \overset{11}{11} \end{matrix} = \frac{1}{\sqrt{2}} \begin{bmatrix} 1 & 1 & 1 & 1 \\ 1 & -1 & 1 & -1 \\ 1 & 1 & -1 & -1 \\ 1 & -1 & -1 & 1 \end{bmatrix}$$

20

Naturally Ordered Hadamard

- Multiplying $(-1)^x$ by $(-1)^y = (-1)^{x+y}$: Yields $(-1)^{(2n)}$ or $(-1)^{(2n)+1}$
- Where n is an Integer $n \in \mathbb{Z}$, $\mathbb{Z} = \{0, 1, 2, \dots\}$
- Exponentiating -1 to a non-negative Integer Results in:

$$(-1)^{2n} = +1 \quad (-1)^{2n+1} = -1$$

- Therefore,

$$(-1)^{(i \wedge j) + (k \wedge m)} = (-1)^{2n} = +1$$

$$(-1)^{(i \wedge j) + (k \wedge m)} = (-1)^{2n+1} = -1$$

- We Only Need to Consider if Exponent is Even or Odd
 - When: $(i \wedge j) + (k \wedge m) = 2n \rightarrow (-1)^{(i \wedge j) + (k \wedge m)} = +1$
 - When: $(i \wedge j) + (k \wedge m) = 2n + 1 \rightarrow (-1)^{(i \wedge j) + (k \wedge m)} = -1$
- This is Modulo-2 Addition, can Replace with Exclusive-OR

21

Naturally Ordered Hadamard

- We Only Need to Consider if Exponent is Even or Odd
 - When: $(i \wedge j) + (k \wedge m) = 2n \rightarrow (-1)^{(i \wedge j) + (k \wedge m)} = +1$
 - When: $(i \wedge j) + (k \wedge m) = 2n + 1 \rightarrow (-1)^{(i \wedge j) + (k \wedge m)} = -1$
- This is Modulo-2 Addition, can Replace with Exclusive-OR
 - When: $(i \wedge j) + (k \wedge m) = 2n \rightarrow (i \wedge j) \oplus (k \wedge m) = 0$
 - When: $(i \wedge j) + (k \wedge m) = 2n + 1 \rightarrow (i \wedge j) \oplus (k \wedge m) = 1$
- Can Express $H^{\otimes 2}$ Hadamard Matrix as:

$$H^{\otimes 2} = \left(\frac{1}{\sqrt{2}} \times \frac{1}{\sqrt{2}} \right) \begin{bmatrix} \overset{00}{(-1)^{0 \wedge 0 \oplus 0 \wedge 0}} & \overset{01}{(-1)^{0 \wedge 0 \oplus 0 \wedge 1}} & \overset{10}{(-1)^{0 \wedge 1 \oplus 0 \wedge 0}} & \overset{11}{(-1)^{0 \wedge 1 \oplus 0 \wedge 1}} \\ \overset{00}{(-1)^{1 \wedge 0 \oplus 1 \wedge 0}} & \overset{01}{(-1)^{1 \wedge 0 \oplus 1 \wedge 1}} & \overset{10}{(-1)^{1 \wedge 1 \oplus 1 \wedge 0}} & \overset{11}{(-1)^{1 \wedge 1 \oplus 1 \wedge 1}} \\ \overset{00}{(-1)^{1 \wedge 0 \oplus 0 \wedge 0}} & \overset{01}{(-1)^{1 \wedge 0 \oplus 0 \wedge 1}} & \overset{10}{(-1)^{1 \wedge 1 \oplus 0 \wedge 0}} & \overset{11}{(-1)^{1 \wedge 1 \oplus 0 \wedge 1}} \\ \overset{00}{(-1)^{1 \wedge 0 \oplus 1 \wedge 0}} & \overset{01}{(-1)^{1 \wedge 0 \oplus 1 \wedge 1}} & \overset{10}{(-1)^{1 \wedge 1 \oplus 1 \wedge 0}} & \overset{11}{(-1)^{1 \wedge 1 \oplus 1 \wedge 1}} \end{bmatrix} \begin{matrix} 00 \\ 01 \\ 10 \\ 11 \end{matrix}$$

$$H^{\otimes 2} = \frac{1}{\sqrt{2}} \begin{bmatrix} \overset{00}{(-1)^0} & \overset{01}{(-1)^0} & \overset{10}{(-1)^0} & \overset{11}{(-1)^0} \\ \overset{00}{(-1)^0} & \overset{01}{(-1)^1} & \overset{10}{(-1)^0} & \overset{11}{(-1)^1} \\ \overset{00}{(-1)^0} & \overset{01}{(-1)^0} & \overset{10}{(-1)^1} & \overset{11}{(-1)^1} \\ \overset{00}{(-1)^0} & \overset{01}{(-1)^1} & \overset{10}{(-1)^0} & \overset{11}{(-1)^1} \end{bmatrix} \begin{matrix} 00 \\ 01 \\ 10 \\ 11 \end{matrix} = \frac{1}{\sqrt{2}} \begin{bmatrix} 1 & 1 & 1 & 1 \\ 1 & -1 & 1 & -1 \\ 1 & 1 & -1 & -1 \\ 1 & -1 & -1 & 1 \end{bmatrix}$$

22

Notation

- Using this Form for Naturally Ordered Hadamard
 - Following Function Notation is Helpful
 - DO NOT Confuse with BraKet EXPECTED VALUE!!!!
 - The COMMA is Important (this is NOT $\langle \mathbf{A} \rangle$ or $\langle \Psi | \mathbf{A} | \Psi \rangle$)

$$\langle , \rangle: \{0,1\}^n \times \{0,1\}^n \rightarrow \{0,1\}$$
 - Inner Product Function over Strings, $\mathbb{B}^{2n} = \{0,1\}^{2n} \rightarrow \mathbb{B}$

EXAMPLE: Two n -bit Strings

$$\mathbf{x} = x_{n-1}x_{n-1} \cdots x_2x_1x_0 \quad \mathbf{y} = y_{n-1}y_{n-1} \cdots y_2y_1y_0$$

- Note, We Use Bit-wise Exclusive-OR (a string):

$$\mathbf{x} \oplus \mathbf{y} = (x_{n-1} \oplus y_{n-1}), (x_{n-1} \oplus y_{n-1}), \dots, (x_1 \oplus y_1), (x_0 \oplus y_0)$$

- The "Inner Product" Notation is a Single Value:

$$\langle \mathbf{x}, \mathbf{y} \rangle = (x_{n-1} \wedge y_{n-1}) \oplus (x_{n-1} \wedge y_{n-1}) \oplus \cdots \oplus (x_1 \wedge y_1) \oplus (x_0 \wedge y_0)$$

23

Bit-String Inner Product Properties

$$\langle , \rangle: \{0,1\}^n \times \{0,1\}^n \rightarrow \{0,1\}$$

$$\langle \mathbf{x}, \mathbf{0} \rangle = 0$$

$$\langle \mathbf{0}, \mathbf{y} \rangle = 0$$

$$\langle \mathbf{x}, \mathbf{1} \rangle = x_{n-1} \oplus x_{n-2} \oplus \cdots \oplus x_1 \oplus x_0 \quad \langle \mathbf{1}, \mathbf{y} \rangle = y_{n-1} \oplus y_{n-2} \oplus \cdots \oplus y_1 \oplus y_0$$

$$\langle \mathbf{x} \oplus \bar{\mathbf{x}}, \mathbf{y} \rangle = \langle \mathbf{x}, \mathbf{y} \rangle \oplus \langle \bar{\mathbf{x}}, \mathbf{y} \rangle$$

$$\langle \mathbf{x}, \mathbf{y} \oplus \bar{\mathbf{y}} \rangle = \langle \mathbf{x}, \mathbf{y} \rangle \oplus \langle \mathbf{x}, \bar{\mathbf{y}} \rangle$$

$$\langle \mathbf{x} \oplus \bar{\mathbf{x}}, \mathbf{y} \rangle = \langle \mathbf{1}, \mathbf{y} \rangle$$

$$\langle \mathbf{x}, \mathbf{y} \oplus \bar{\mathbf{y}} \rangle = \langle \mathbf{x}, \mathbf{1} \rangle$$

$$\langle \mathbf{0} \wedge \mathbf{x}, \mathbf{y} \rangle = \langle \mathbf{0}^n, \mathbf{y} \rangle = 0 \quad \langle \mathbf{x}, \mathbf{0} \wedge \mathbf{y} \rangle = \langle \mathbf{x}, \mathbf{0}^n \rangle = 0$$

$$\langle \mathbf{1} \wedge \mathbf{x}, \mathbf{y} \rangle = \langle \mathbf{1}^n \wedge \mathbf{x}, \mathbf{y} \rangle = \langle \mathbf{x}, \mathbf{y} \rangle \quad \langle \mathbf{x}, \mathbf{1} \wedge \mathbf{y} \rangle = \langle \mathbf{x}, \mathbf{1}^n \wedge \mathbf{y} \rangle = \langle \mathbf{x}, \mathbf{y} \rangle$$

24

Hadamard with New Notation

$$\mathbf{H}^{\otimes 2} = \frac{1}{\sqrt{2^2}} \begin{array}{c|cc} \begin{array}{cc} 00 & 01 \\ \hline 10 & 11 \end{array} & \begin{array}{cc} (-1)^0 & (-1)^0 \\ (-1)^0 & (-1)^1 \\ \hline (-1)^0 & (-1)^0 \\ (-1)^1 & (-1)^1 \end{array} & \begin{array}{cc} (-1)^0 & (-1)^0 \\ (-1)^0 & (-1)^1 \\ \hline (-1)^1 & (-1)^1 \\ (-1)^1 & (-1)^0 \end{array} \end{array} \begin{array}{c} 00 \\ 01 \\ \hline 10 \\ 11 \end{array} = \frac{1}{\sqrt{2^2}} \begin{bmatrix} 1 & 1 & 1 & 1 \\ 1 & -1 & 1 & -1 \\ 1 & 1 & -1 & -1 \\ 1 & -1 & -1 & 1 \end{bmatrix}$$

$$\mathbf{H}^{\otimes 2} = \left(\frac{1}{\sqrt{2}} \times \frac{1}{\sqrt{2}} \right) \begin{array}{c|cc} \begin{array}{cc} 00 & 01 \\ \hline 10 & 11 \end{array} & \begin{array}{cc} (-1)^{\langle 00,00 \rangle} & (-1)^{\langle 00,01 \rangle} \\ (-1)^{\langle 01,00 \rangle} & (-1)^{\langle 01,01 \rangle} \\ \hline (-1)^{\langle 10,00 \rangle} & (-1)^{\langle 10,01 \rangle} \\ (-1)^{\langle 11,00 \rangle} & (-1)^{\langle 11,01 \rangle} \end{array} & \begin{array}{cc} (-1)^{\langle 00,10 \rangle} & (-1)^{\langle 00,11 \rangle} \\ (-1)^{\langle 01,10 \rangle} & (-1)^{\langle 01,11 \rangle} \\ \hline (-1)^{\langle 10,10 \rangle} & (-1)^{\langle 10,11 \rangle} \\ (-1)^{\langle 11,10 \rangle} & (-1)^{\langle 11,11 \rangle} \end{array} \end{array} \begin{array}{c} 00 \\ 01 \\ \hline 10 \\ 11 \end{array}$$

25

Naturally Ordered Hadamard

- Now Can Write General Formula for:

$$\mathbf{H}^{\otimes n}(i, j) = \frac{1}{\sqrt{2^n}} (-1)^{\langle i, j \rangle}$$

- i and j are row and column numbers written as binary strings
- Quantum State Vector (example):

$$|0\rangle = |000 \dots 00\rangle = \begin{bmatrix} 1 \\ 0 \\ 0 \\ \vdots \\ 0 \\ 0 \end{bmatrix} \begin{array}{c} 000 \dots 00 \\ 000 \dots 01 \\ 000 \dots 10 \\ \vdots \\ 111 \dots 10 \\ 111 \dots 11 \end{array}$$

Red strings are row numbers written as binary strings – NOT part of equation

26

Naturally Ordered Hadamard

- Multiplying a Quantum State Vector by $H^{\otimes n}$

Leftmost Column
of Hadamard
Matrix

$$H^{\otimes n}|0\rangle = H^{\otimes n}[-, 0] = \frac{1}{\sqrt{2^n}} \begin{bmatrix} 1 \\ 1 \\ 1 \\ 1 \\ \vdots \\ 1 \\ 1 \end{bmatrix} \begin{matrix} 000 \dots 00 \\ 000 \dots 01 \\ 000 \dots 10 \\ \vdots \\ 111 \dots 10 \\ 111 \dots 11 \end{matrix} = \frac{1}{\sqrt{2^n}} \sum_{x \in \{0,1\}^n} |x\rangle$$

- For Arbitrary Quantum State $|y\rangle$

$$H^{\otimes n}|y\rangle = H^{\otimes n}[-, y] = \frac{1}{\sqrt{2^n}} \sum_{x \in \{0,1\}^n} (-1)^{\langle x, y \rangle} |x\rangle$$

- Denotes "don't care" or All Possible Rows from 0 to $n-1$